THORN

96631665 <NS SRW FX 16L72-830 HFX CL1 SCN ANT

ISO 9223 C3	IP66	halogen	IK08		CE			Ta -30 +50

Compact LED Park and path luminaire of 16 LED optics configured as 2/8 variant. Colour rendering Ra > 80, colour temperature 3000 K. Luminaire with "street narrow" road light distribution with backlight component to the rear. Luminaire of aluminium, microtextured paint in anthracite. ambient temperature: -30°C to +50°C. Integrated IP68 plug/socket for plug & play connection. Installation to wall. Luminaire wired with halogen-free leads; degree of protection: IP66; class of protection: SC1, Dimensions: 369 x 216 x 118 mm weight: 7.6 kg.

TLG_NISI_F_ARS2X8.jpg

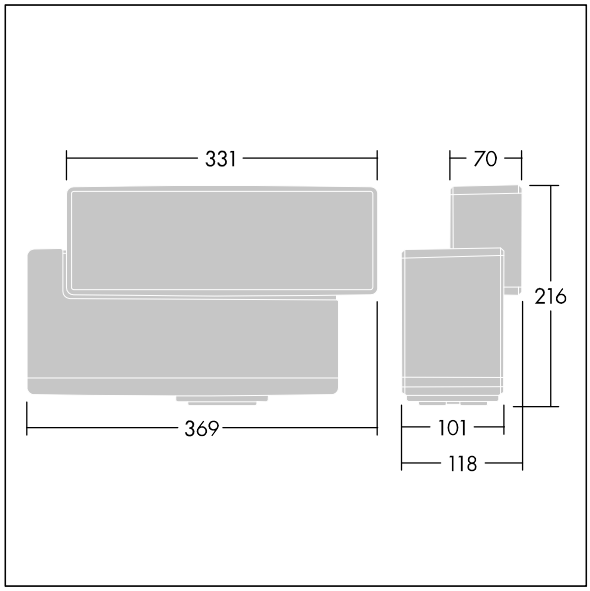

TLG_NISI_M_2x8.wmf

Tento výrobek obsahuje světelný zdroj s třídou energetické účinnosti D.

Hodnoty označené * představují stanovené rozměrové hodnoty. Thorn používá ověřené a testované díly od předních dodavatelů, avšak v průběhu jmenovité životnosti výrobku může dojít k ojedinělým případům poruch jednotlivých LED souvisejících s technologií. Mezinárodní normy stanoví tolerance počátečního toku a připojeného zatížení na ±10%. Pokud není uvedeno jinak, platí hodnoty pro okolní teplotu 25°C.

Produkty ThornLighting podléhají neustálému vývoji.Veškeré informace uvedené v tomto katalogovém listu mají pouze informativní charakter.Vyhrazujeme si právo provádet technické nebo formální zmeny našich produktu bez dalšího zverejnení.©ThornLighting